



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number : 0 529 104 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication of patent specification :  
19.07.95 Bulletin 95/29

(51) Int. Cl.<sup>6</sup> : H04N 1/00, H04N 1/41,  
H04N 1/32

(21) Application number : 90850077.0

(22) Date of filing : 23.02.90

AB

(54) Telecommunication system.

(30) Priority : 02.03.89 IL 89461

(43) Date of publication of application :  
03.03.93 Bulletin 93/09

(45) Publication of the grant of the patent :  
19.07.95 Bulletin 95/29

(84) Designated Contracting States :  
AT BE CH DE DK ES FR GB GR IT LI LU NL SE

(56) References cited :  
EP-A- 0 217 722  
JP-A-62 143 531  
JP-A-63 237 624  
US-A- 4 805 208  
PT / ELEKTROTECHNIEK ELEKTRONICA vol.  
41, no. 2, February 1986, DEN HAAG, NEDER-  
LAND pages 38-41 P. HENNEVELT 'FAC-  
SIMILE-APPARATUUR'

(56) References cited :  
DATABASE WPIL Week 8526, Derwent Publi-  
cations Ltd., London, GB; AN 81-C9513D &  
US-A-4523309  
PATENT ABSTRACTS OF JAPAN vol. 012, no.  
130 (E-603)21 April 1988 & JP-A-62254537

(73) Proprietor : ECI TELECOM LTD.  
30 Hasivim Street  
49 130 Petach Tikva (IL)

(72) Inventor : Piasecki, Joshua  
6 Armonim Street  
Ramat Gan (IL)  
Inventor : Sourani, Sason  
14 Hageula Street  
Hod Hasharon (IL)

(74) Representative : Freed, Arthur Woolf et al  
Reginald W. Barker & Co.,  
Chancery House,  
53-64, Chancery Lane  
London, WC2A 1QU (GB)

EP 0 529 104 B1

Note : Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

## Description

### FIELD OF THE INVENTION

The present invention relates to communications apparatus generally and more particularly to telecommunication systems with facsimile demodulation and modulation capabilities.

### BACKGROUND OF THE INVENTION

Various types of telecommunication systems for interconnecting telephone communication trunks to a transmission network are known in the patent literature and in the marketplace. One type of such apparatus is known as Digital Circuit Multiplication Equipment systems which typically include Time Assignment Speech Interpolation (TASI) Apparatus. There is described in applicant's European Patent EP-B-00 25,465 and in applicant's U.S. Patent US-A-4,523,309, TASI apparatus which has gained widespread market acceptance.

A particular feature of the abovementioned U.S. Pat. US-A-4,523,309 is that control information such as the assignment, synchronization and identification information is transmitted along the communication channels instead of on separate signaling channels as in the prior art. In addition, the signaling communication channel assignment information is also supplied via the voice channels rather than via the signaling channels.

Another type of telecommunication system for interconnecting telephone communication trunks to a transmission network is described in a paper by R.W. Muise et al entitled "Experiments in Wideband Packet Technology," given at the International Zurich Seminar on Digital Communication, April, 1986. The paper discloses a system which comprises an access interface and a wideband packet switch for sending packets of speech and data across a transmission network.

There are known Digital Circuit Multiplication Equipment (DCME) systems in which the advantages of Digital Speech Interpolation (DSI) and adaptive pulse code modulation (ADPCM) compression techniques have been incorporated, as demonstrated in applicant's U.S. Patent US-A-4,747,096 which also uses voice channels for the transmission of control information. In addition, the system detects voiceband data transmission and compresses it according to an optimal ADPCM adapted for voiceband data.

However, the optimal ADPCM adapted for voiceband data compresses the voiceband data at a 2:1 rate whereas the compression rate of the DSI and the ADPCM for speech is 6:1. Thus, with the current proliferation of personal facsimile machines whose signals when transmitted via a DCME are compressed as voiceband data, the overall compression rate of a

DCME is approaching 3:1.

In a Delayed Contribution D.788/XVIII presented at the CCITT Working Party XVIII/8 in Geneva Switzerland on 8 - 15 July, 1986 by EUTELSAT entitled "EUTELSAT Considerations on LRE-DSI characteristics for Digital Circuit Multiplication", there appears a proposal to demodulate V.29 voice band data signals in order to enable such signals to be transmitted via a compression system which employs ADPCM encoding for signal compression. This reference only proposes V.29 modem demodulation in DCME but does not explain how to do it. Importantly, it does not teach how to detect facsimile signals for subsequent demodulation thereof.

In a Final Report submitted to the International Maritime Satellite Organization (INMARSAT) entitled "Study of Facsimile Interface Units for Future Inmarsat Digital Communications System" dated July 28, 1988 there is proposed a concept for demodulation of an all-facsimile channel. No consideration is given to detection of facsimile signals on a "mixed" channel which carries both speech and facsimile signals, and switching between different processing routes for facsimile and speech in response to such detection. Furthermore, this reference does not deal with many facsimile protocols which are in common use in such "mixed" channels.

US-A-4805208 discloses a telecommunication system for interconnecting a plurality of telecommunication trunks carrying voice and data signals to a transmission network. The system comprises transmission means at at least a first end of the transmission network including detecting means for detecting voice or data signals on the plurality of telephone communication trunks. Detected voice signals are transmitted after compression and detected data signals are transmitted after demodulation. Receiving means are provided at at least a second end of the transmission network and include means for decompressing the voice signals and means for remodulating the data signal.

JP-A-63237624 discloses a time division multiplexer which discriminates between CCITT V.29 signals and voice signals. CCITT V.29 signals are demodulated prior to transmission whereas voice signals are compressed prior to transmission.

JP-A-62143531 discloses a telecommunication system for interconnecting a plurality of communication trunks carrying voice, facsimile and non-voice band data signals.

The present invention seeks to provide a telecommunication system with improved facsimile signal compression capabilities.

In accordance with one aspect of the present invention, there is provided a telecommunication system for interconnecting a plurality of telephone communication trunks, carrying voice, facsimile and non-facsimile voiceband data signals to a transmission

network, the system comprising:

transmission means at at least a first end of the transmission network including:

means for detecting facsimile signals, as distinguished from other voiceband data signals, on the plurality of telephone communication trunks by detecting a signal unique to facsimile signals;

means for demodulating only facsimile signals in response to detection by the means for detecting of facsimile signals on the plurality of telephone communication trunks; and

means for transmitting along the transmission network, in demodulated form, a facsimile signal output of the means for demodulating; and

receiving means at at least a second end of the transmission network including:

means for modulating the demodulated facsimile signals received along the transmission network to produce voiceband facsimile signals.

Preferably, the means for demodulating demodulates only facsimile signals.

Preferably, the means for detecting detects a signal sequence characteristic of a plurality of facsimile modes of operation.

Preferably, the transmission means further comprises means for determining the mode of operation of the detected facsimile system and the means for determining the mode of operation comprises:

a plurality of facsimile demodulators, each being programmed to demodulate at least one expected modem signal according to a facsimile standard;

means for supplying incoming detected facsimile signals simultaneously to the plurality of facsimile demodulators; and

means for determining which of the plurality of facsimile demodulators successfully demodulates an incoming facsimile signal.

Preferably, the system also comprises means for compressing signals other than those detected by said means for detecting; and

means for transmitting said other signals along said transmission network.

Preferably, said demodulating means comprises facsimile signal demodulator and forward error correction means and wherein said forward error correction means are operative to protect the output of said facsimile demodulator.

Preferably, the transmission network comprises a plurality of transmission channels and the system comprises means for assigning at least one of the signals received by the transmission system from the plurality of communication trunks to one of the transmission channels; and

means for communicating the assignment and optionally other information regarding the signals along the transmission network.

It is understood that the demodulation and modulation may be complete including, for example, de-

scrambling and scrambling, or incomplete, not including scrambling and descrambling.

There are many facsimile transmissions which do not adhere to the standard protocol definitions as defined in CCITT Red Book Rec. T.30, the data rate and mode of operation of the incoming facsimile signal cannot be derived from a protocol analysis. The present invention can provide facsimile signal classification by waveform analysis, rather than protocol analysis. In this case, at the beginning of each facsimile signal burst, a plurality of facsimile demodulators are used to simultaneously demodulate the incoming facsimile signals.

The present invention can provide a facsimile signal compression ratio between 4:1 and 6:1, a ratio much higher than that achievable by treating facsimile transmissions as voiceband data signals.

According to another aspect of the present invention, there is provided a method for interconnecting a plurality of telephone communication trunks carrying voice, facsimile and non-facsimile voiceband data signals, to a transmission network, the method comprising:

detecting facsimile signals, as distinguished from other voiceband data signals received from the plurality of telephone communication trunks; by detecting a signal unique to facsimile signals;

demodulating only detected facsimile signals in response to said detecting of facsimile signals to form demodulated facsimile signals; and

transmitting the demodulated facsimile signals along a transmission network.

## BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood and appreciated more fully from the following detailed description taken in conjunction with the drawings in which:

Fig. 1 is a functional block diagram illustration of the transmit side and the receive side of the system showing graphically functions of the international telephone multiplication system, including the facsimile signal compression functions, constructed and operative in accordance with a preferred embodiment of the present invention;

Figs. 2A and 2B are block diagram illustrations of elements of the transmit circuitry constructed and operative in accordance with a preferred embodiment of the present invention;

Fig. 3 is a block diagram illustration of the facsimile demodulator useful in the apparatus of Figs. 2A and 2B;

Figs. 4A and 4B are block diagram illustrations of elements of the receive circuitry constructed and operative in accordance with a preferred embodiment of the present invention;

Fig. 5 is a block diagram illustration of the facsi-

mile modulator useful in the apparatus of Figs. 3A and 3B; and

Fig. 6 is a block diagram illustration of the signal flow from a facsimile machine, through local telephone lines, to a switching center useful in understanding the system of Fig. 1.

#### DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Reference is now made to Fig. 6 which illustrates the data flow from a facsimile machine through a local telephone system to a transmission network. A facsimile machine 10, according to CCITT Red Book, Malaga-Torremolinos 1984, Recommendations T.4 and T.30, comprises a facsimile scanner and encoder 12, according to CCITT Red Book Recommendation T.4, which produces a binary bit stream, at rates up to 9.6 kbit/s, representing a compressed version of the scanned page, and a modulator 14, such as the R96MFX Monofax by Rockwell International, which modulates the binary bit stream onto an analog waveform for transmission through local analog telephone systems.

The Group 3 facsimile call procedure is defined in detail in CCITT Red Book Rec. T.30. Typically, the facsimile call begins with a 2100 Hz. tone from the called terminal, followed by a coordination dialog between the two facsimile machines at a rate of 300 bit/s, modulated according to CCITT Red Book Rec. V.21, channel 2. The facsimile messages are transmitted, page by page, at data rates of 2400, 4800, 7200, and 9600 bit/s, modulated according to CCITT Red Book Rec. V.27 for the two lower rates and according to CCITT Red Book Rec. V.29 for the two upper rates. It should be noted that CCITT Red Book Rec. T.30 also allows for non-standard 300 bit/s protocols.

An analog to digital (A/D) converter 16 receives the analog waveform and samples the signal in order to transform it to a standard 64 kbit/s pulse code modulated (PCM) digital signal. The digital PCM signal is then transmitted, as one time slot of a 2.048 or a 1.544 Mbit/s signal, via a digital exchange 18, such as the 4ESS from AT&T, which may subsequently transmits it to a transmission system, such as is described hereinbelow. It should be noted that the digital signal produced by the facsimile scanner 12 is a binary data signal and the digital signal produced by the A/D converter 16 is in the form of digital samples of an analog waveform. The two rates are significantly different (up to 9.6 kbit/s vs. 64 kbit/s) and thus, the transmission of the binary data via current methods of telephony is wasteful.

According to the teachings of the present invention, the transmission efficiency of digital links is increased by reproducing the originally scanned and encoded binary data from the PCM signal of the

modulated analog waveform and then transmitting it along a transmission network as a 9.6 kbit/s signal. According to an alternative embodiment of the invention the binary data is transmitted as a 16 kbit/s signal which comprises the 9.6 kbit/s signal and additional error correction code, thus significantly increasing the robustness of the transmission in presence of line errors. Without error correction, the system of the present invention achieves a 6:1 compression ratio for facsimile transmissions and with error correction it achieves a 4:1 compression ratio.

Reference is now made to Fig. 1, which is an overall functional system block diagram of the transmission and reception end of a telecommunication system, indicating three methods of signal compression as well as the trunk expanding functions of the various elements of the telecommunication system. The transmit side is described with respect to Fig. 1. The receive side is mirror symmetric and will not be described with respect to Fig. 1. Many of the components of the telecommunication system are substantially similar to those described and claimed in the aforesaid U.S. Patent US-A-4,747,096, which is incorporated herein by reference, and therefore, will not be described in detail. It will be appreciated that the telecommunication system described in Fig. 1 can be implemented in a point to point configuration, in a multiclque configuration, and in a multidestination configuration, as defined in CCITT Blue Book Rec. G.763. Additionally, it can be implemented as an access terminal for traffic compression into a packet switching network.

The transmission apparatus includes a trunk PCM interface (TDLI) 20 which is operative to provide interfacing between 1.544 Mbit/s or 2.048 Mbit/s PCM signals and the internal 2.048 Mbit/s (NRZ) signals employed in the telecommunication system. It is operative to provide synchronization, plesiochronous buffering and optional format conversion.

Downstream of TDLI 20 there is provided a time slot interchange (TSI) 22 which provides time slot mapping. It enables up to ten 24-channel bit streams to be regrouped into eight 30/32 channel bit streams.

Digital speech interpolation circuitry (DSI) 24 provides voice compression by means of the time assignment speech interpolation (TASI) of U.S. Patent US-A-4,523,309 and is operative to compress up to 240 trunks generally into 62 bearer channels. Additionally, DSI 24 provides detection circuitry for classifying incoming signals as selected facsimile signals, such as Group 3 facsimile signals, and as other signals where other signals typically include speech, tone and non-facsimile voiceband data. This enables the transmission apparatus to separately compress facsimile signals and to apply the conventional compression techniques for speech and non-facsimile voiceband data signals.

Further compression is provided by a signal com-

pression circuit 25 typically comprised of Adaptive Differential Pulse Code Modulation (ADPCM) circuitry 26 and Variable Bit Rate (VBR) circuitry 28, voiceband data optimized algorithm circuitry 27 and facsimile modem 29.

ADPCM circuitry 26 employs an ADPCM algorithm, in accordance with the Red Book CCITT G.721 recommendation for compressing speech. VBR circuitry 28 is typically provided in conjunction with ADPCM 26 and is operative to effectively create additional bearer channels (in excess of 62) to overcome periods of traffic overload, as described in aforesaid U.S. Patent US-A-4,747,096. The ADPCM 26 and the VBR 28, in conjunction with the DSI 24, provide a compression ratio of typically 6:1 for speech signals. It will be appreciated that circuitry employing other speech compression techniques, such as 16 kbit/s speech coding, can replace the ADPCM 26 circuitry.

Voiceband data is routed through voiceband data optimized algorithm 27 which employs ADPCM codecs specifically optimized for reliable transmission of voiceband data, as described in aforesaid U.S. Patent US-A-4,747,096. The voiceband data algorithm is transparent to voiceband data signals and provides a 2:1 compression ratio. It will be appreciated that the voiceband data compression may be implemented using other algorithms, such as that of CCITT Blue Book, Melbourne 1988, Rec. G.723.

In accordance with a preferred embodiment of the present invention, facsimile modem 29 is provided for reproducing a plurality of original facsimile binary data from a plurality of PCM signals, for optionally incorporating error correction information into the plurality of original facsimile binary data and for multiplexing the resultant signals. The optional error correction function is typically provided when the transmission network is of the type where performance is typically degraded.

Multiplexer 31 multiplexes the output of the signal compression stage, comprising ADPCM 26, VBR 28, voiceband data algorithm 27 and facsimile modem 29 into one generally fully populated 2.048 or 1.544 Mbit/s signal. At each sample period, which is typically 125 microseconds, multiplexer 31 produces one bit frame with bits from compressed channels.

An alternative embodiment of the invention comprises a multiplexer 31 which incorporates wideband packet technology, as described in the aforementioned paper by R.W. Muise et al entitled "Experiments in Wideband Packet Technology". In the alternative embodiment, the multiplexer 31 is operative to act as a Packet Assembler (PA) to gather and packetize a sequence of samples of compressed speech, voiceband data or facsimile data and to subsequently transmit the packets to a transmission network.

Interface between the 2.048 Mbit/s output from the multiplexer 31 to the standard 1.544/2.048 Mbit/s standard PCM bearer channels is provided by the

Bearer PCM Interface (TDLI) 30, described in aforesaid U.S. Patent US-A-4,747,096.

Reference is now made to Fig. 2, which illustrates in block diagram form certain elements of the transmission apparatus of the telecommunication system pertaining to the present invention and corresponding to the functional block diagram of Fig. 1. A complete description of the remaining elements can be found in aforesaid U.S. Patent US-A-4,747,096.

Eight 2.048 Mbit/s bit streams emerging from the TSI 22 are supplied to the DSI circuitry 24 and are directed in parallel to a transmit delay memory 50, to a facsimile detector 53 and to other detectors, such as speech and tone detection circuitry 52.

Speech and tone detection (SPD) circuitry 52 typically comprises four SPD circuits, each of which receives  $2 \times 2.048$  Mbit/s digital streams from the transmit TSI circuitry 22. The SPD circuitry 52 is operative to examine each time slot for the presence of speech energy above an adjustable threshold which is normally set at -32 dBmO.

If speech energy is present, a main CPU 44 is notified of the time slot that has active speech. Additionally, the tone detector portion of the SPD circuitry 52 examines the active speech for the continuous presence of a 2100 Hz tone (CCITT Red Book Rec. G.164 or Rec. V.25 for voiceband data or Rec. T.30 for facsimile data). When the tone is detected, the main CPU 44 is notified.

Facsimile detector 53 additionally receives all eight of the 2.048 Mbit/s bit streams received from TSI 22 and detects the presence of facsimile signals on them. Since Group 3 facsimile systems begin their 300 bit/s transmissions with a preamble, defined in the 1984 CCITT Red Book Recommendation T.30 paragraph 5.3.1 to be a series of flag characters transmitted for one second on a 300 bit/s signal, it will be appreciated that the preamble is unique to facsimile systems and thus, can be utilized for reliable detection of facsimile signals; other data protocols transmit at most one or two flag characters. Thus, facsimile detector 53 detects a facsimile transmission upon identifying at least five consecutive flag characters.

If a facsimile transmission is present, facsimile detector 53 notifies the main CPU 44 of the trunk channel in which it occurs. If the detection occurs for a trunk channel which is not classified as carrying facsimile signals, then the main CPU 44 marks the trunk channel as a facsimile trunk channel. Until marked otherwise, the trunk channel remains as a facsimile trunk channel and any further detections of a facsimile transmission on that trunk channel are ignored.

The main CPU 44, typically based on the Intel 80286 microcomputer, controls the DSI operation as well as other functions of the telecommunication system. Its major task, as part of the transmission appa-

ratus, is to receive activity information about facsimile transmissions and other signals, such as speech, tone and voiceband data, and to assign an available bearer bit portion to the active trunk. In order to do so, it routes the time slots of the eight 2.048 Mbit/s channels, via a transmit Digital Speech Interpolation (DSI) switch 56, to either of the ADPCM 26, the voiceband data algorithm 27 or the facsimile modem 29, depending on the results of the SPD and tone detector 52 and the facsimile detector 53. Main CPU 44 also indicates to a facsimile CPU 80 which is part of the facsimile modem 29 and which is described in more detail hereinbelow, in which time slot it will receive a facsimile transmission and in which bit portion it should transmit the demodulated facsimile transmission. The main CPU 44 additionally detects the completion of a facsimile transmission on a facsimile channel. The software for the main CPU 44 is taken mostly from apparatus of the type described in the aforesaid U.S. Patent US-A-4,747,096.

Following initial detection of a facsimile transmission, the system switches to a facsimile signal path. The switching takes place during the first silent period during facsimile "handshake" following detection. Effecting the switching during the silent period avoids undesirable signal transients.

The transmit DSI switch 56 receives 8 x 2.048 Mbit/s digital streams from the transmit delay 50 and selects, in response to commands from the main CPU 44, an appropriate time slot. The standard 2.048 Mbit/s bit stream contains 30 speech time slots (TS); however, in accordance with U.S. Patent US-A-4,747,096, when TS 16 is not used for the transmission of signaling information, 31 time slots are available for speech.

Thus, two bit streams of up to 62 time slots during operation at normal speech traffic levels, one bit stream with up to 31 voiceband data signals and one bit stream with up to 31 facsimile signals are provided. Additionally, an additional 20 time slots are provided for use during periods of traffic overload, as a result of VBR operation. The 144 available time slots form an output of five 2.048 Mbit/s digital streams where the fifth 2.048 Mbit/s digital stream comprises the 30 additional time slots. The remaining 11 time slots of the fifth 2.048 Mbit/s digital stream are unused.

The first two and last one of the five 2.048 Mbit/s digital streams are dedicated to trunk channels with speech activity, the third is dedicated to trunks with non-facsimile voiceband data signals, and the fourth is dedicated to trunks with facsimile transmissions.

DSI 24 also comprises a message generator 54 which receives 2 bytes (16 bits) of message information from the main CPU 44. The message information indicates to the receive circuitry the location, on the bearer bit stream, of the assigned bits for each compressed trunk channel and the type of traffic, speech,

voiceband data or facsimile data, carried therein.

Signal compression circuitry 25 comprises a signal compression assembly 64 which receives the five 2.048 Mbit/s digital streams from the transmitting DSI switch 56. The signal compression assembly 64 comprises ADPCM encoders and data optimized ADPCM encoders, fully described in aforesaid U.S. Patent 4,747,096, and facsimile demodulators 67 with optional Forward Error Correction elements (FEC) 69, as described hereinbelow.

Each facsimile demodulator 67 demodulates the 64 kbit/s PCM bit stream received from the DSI switch 56, thus reconstructing the original scanned and encoded bit stream produced by the facsimile machine 10. The optional FEC 69 adds error correction information to the signal to increase the rate of the signal from up to 9.6 kbit/s to 16 kbit/s, a rate which is a submultiple of the 64 kbit/s standard rate of the bearer bit stream.

Multiplexer 31 comprises a buffer memory 68 which combines the outputs of the signal compression assembly 64 into one 2.048 Mbit/s bearer signal. According to the traffic on the transmission network, it will assign nibble time slots to compressed speech and voiceband data signals and the appropriately sized time slots to demodulated facsimile signals, as described hereinbelow.

According to an alternative embodiment of the present invention, buffer memory 68 stores the output of the signal compression assembly 64 and generates, typically every packet interval of 16 msec, packets of typically 128 4 bit samples with an additional 40 bits of packet header information. It should be noted that under overload traffic conditions, the number of bits for each sample will be smaller due to the operation of the VBR 28.

Buffer memory 68 releases the packets under control of the main CPU 44 which receives the speech, voiceband data and facsimile signal activity information from SPD and tone detector 52 and facsimile detector 53 every packet interval and assigns bearer bit portions to each active trunk channel.

Reference is now made to Fig. 3 which illustrates the elements of the facsimile demodulator 67 and of the optional FEC 69. According to a preferred embodiment of the invention, facsimile demodulator 67 comprises a plurality of facsimile demodulators 126, such as the R96MFX Monofax from Rockwell International, and a plurality of PCM decoders 128 where each PCM decoder 128 is directly connected to a facsimile demodulator 126. A typical transmission apparatus will comprise 40 facsimile demodulators 126 and 40 PCM decoders 128. It will be appreciated that the 40 facsimile demodulators 126 and 40 PCM decoders 128 are needed in order to decode and demodulate facsimile signals from 31 incoming facsimile trunk channels due to the initial overhead of the five demodulators 126.

At the beginning of each signal burst for a trunk channel marked as carrying a 64 kbit/s facsimile transmission, one incoming time slot is routed to typically five PCM decoders 128 via a facsimile transmit TSI (TTSI) 124, such as the PEB 2040 PCM Switch from Siemens. TTSI 124 typically selects the five PCM decoders 128 based on which five facsimile demodulators 126 are currently available.

According to a preferred embodiment of the invention, each PCM decoder 128 converts the incoming PCM signal to the original analog telephone waveform and sends the resultant signal to its corresponding facsimile demodulator 126. It will be appreciated that the PCM decoders 128 are included in order to utilize inexpensive facsimile demodulators 126, such as the Rockwell R96MFX, specifically designed for facsimile machines.

Each of the five facsimile demodulators 126 is tuned to one of the five standard modes of operation for facsimile data, that is, 2.4 or 4.8 kbit/s modulated according to Rec. V.27 ter, 7.2 or 9.6 kbit/s modulated according to Rec. V.29 or 300 bit/s, modulated according to Rec. V.21. Each demodulates the analog telephone waveform it receives from its PCM decoder 128 in an attempt to identify the mode of operation by which the present portion of the facsimile transmission is modulated.

It will be appreciated that it is possible to analyze the facsimile transmission with one facsimile demodulator 126 by utilizing the facsimile demodulator 126 specifically designed for use in facsimile machines 10 to interpret the 300 bit/s protocol between pages which indicate which mode of operation will be used for scanning and encoding the following page. This method has one drawback in that CCITT Red Book Rec. T.30 allows for non-standard protocols between facsimile machines 10.

Thus, a facsimile demodulation system which utilizes one standard facsimile demodulator 126 per facsimile transmission might be unable to interpret the non-standard protocols and thus, be unable to demodulate facsimile transmissions. Therefore, according to a preferred embodiment of the present invention, five facsimile demodulators 126 are utilized to identify the mode of operation of every portion of a facsimile transmission whether it be the 300 bit/s standard or non-standard dialog or the up to 9.6 kbit/s page transmission.

The demodulated data are sent to a buffer 130 and stored there until the demodulator tuned to the correct bit rate and mode of operation is identified. The identification typically takes 0.3 seconds to achieve a positive identification of either a V.29 or V.21 modem by a given demodulator, after which the remaining four demodulators 126 are available and the data they produced in buffer 130 is ignored. Should no positive identification of either the V.29 or V.21 modems is made during the 0.3 second interval and if

during this interval an 1800 Hz tone is detected, then the two demodulators which are tuned to the two alternative transmission rates of the V.27 modem continue to operate. Once positive identification is made by either of those two demodulators, the demodulator which did not make a positive identification becomes available and its output in the buffer 130 is ignored.

The identifying demodulator 126 continues demodulating the signal and sending it to the buffer 130 until the signal terminates, typically at the end of the transmission of one page or at the end of a 300 bit/s message transmission.

It is a particular feature of the present invention that notwithstanding the different times needed to detect the various modems and notwithstanding that detection of the V.27 modem requires more than 0.3 seconds, a 0.3 second delay is sufficient to avoid loss of the beginning of the transmitted signal. This is achieved by commencing transmission of the training sequence characteristic of the V.27 modem once identification of the 1800 Hz signal is made but before positive identification of which transmission mode (i.e. 4.8 or 2.4 kbit/s) has been made.

The buffer 130 is operative to receive the data from the facsimile demodulators 126 as 8 bit words and to organize it such that, on average, a 9.6 kbit/s bit stream is sent. If the demodulated information is at a rate less than the maximal 9.6 kbit/s, then the data rate is increased to 9.6 kbit/s by dummy bit insertion.

The buffer 130 achieves the 9.6 kbit/s average bit stream by ensuring that generally 48 bits are sent within 5 milliseconds. The 48 bits are organized such that at every millisecond, either 10 bits or 9 bits are transmitted. Thus, in each millisecond, three channels of facsimile data are multiplexed into 32 bits, transmitted in 8 sampling frames as 4 bit nibbles per frame.

It should be noted that the remaining 2 to 5 bits of the 32 bits in each millisecond, depending on the number of bits sent per each facsimile channel, are dummy bits. This method achieves a 6:1 compression ratio, i.e. transmission of 6 trunks of 64 kbit/s PCM signals via a single 64 kbit/s time slot in the bearer bit stream.

A selector 136 selects, under control of a facsimile transmit CPU (TCPU) 134, the correctly demodulated and multiplexed signals stored in buffer 130 and sends them to multiplexer 31 as one partly populated 2.048 Mbit/s digital bit stream.

According to an alternative embodiment of the invention, the signal from the selector 136 is routed through FEC 69 which adds forward error correction to the 9.6 kbit/s signal, typically using the Hamming (15,11) code. Thus, to the 10 or 9 bits, described hereinabove, are added 1 or 2 dummy bits, respectively, where one of the bits serves as a message bit to indicate the number of original bits, to produce 11 bits,

another 4 of error correction based on the Hamming (15,11) code, and a final dummy bit to increase the bit count to 16. Thus, two channels of facsimile data are multiplexed into a 32 kbit/s channel, producing a 4:1 compression ratio, i.e. transmission of 4 trunks of 64 kbit/s PCM signals via a single 64 kbit/s time slot in the bearer bit stream.

The operation of the facsimile demodulator 67 is controlled by facsimile CPU 134 which polls the status of the demodulators 126 via a status and control read/write 132, selects five demodulators 126 upon reception of a signal burst, tunes each one to a different standard mode of operation, and indicates to TTSI 124 to switch the current time slot to the five PCM decoders 128. Additionally, it identifies the demodulator 126 which is tuned to the correct mode of operation and indicates to the selector 136 to transmit the data from the identified demodulator 126 to the buffer memory 68, or alternatively, to FEC 69 and from there to buffer memory 68.

The facsimile CPU 134 additionally is connected to the main CPU 44 which indicates to the facsimile CPU 134 which time slots have facsimile data in them, when the facsimile signal burst commences or terminates, and when the facsimile transmission is complete. The completion of a facsimile transmission on a facsimile channel is defined according to the following criteria:

1. A silence period lasting for at least 10 seconds is detected by SPD and tone detector 52 (Fig 2A); or
2. The five facsimile demodulators 126 attempting to demodulate the facsimile transmission fail to do so within a predetermined length of time, typically 500 ms.

If condition 1 is true, then main CPU 44 causes any following signal bursts on that trunk channel to be switched to an ADPCM encoder for speech. If condition 2 is true, the trunk channel is switched to a data optimized ADPCM encoder.

Reference is now made to Fig. 4, which illustrates in block diagram form certain elements of the reception end of a telecommunication system pertaining to the present invention. The reception end corresponds to the mirror of the functional block diagram of Fig. 1 and the signal progresses from a BDLI, to a signal decompression unit, to DSI circuitry and finally, to a TDLI, as described in aforesaid U.S. Patent US-A-4,747,096.

The receive circuitry of Fig. 4 comprises a message receiver 94 (Fig. 3B) which looks for an exclusive message identification code and the message contents following it. Once detected, the message contents are transferred to the main CPU 44 which decodes it to discover the location, on the bearer bit stream, of the assigned bits for each compressed trunk channel and the type of traffic, speech, voice-band data or facsimile data, carried therein. As noted

in U.S. Patent US-A-4,747,096, the main CPU 44 controls both the transmit and receive functions of the system and, in receive mode, controls DSI switch 95 in accordance with the assignment messages received.

The generally fully populated 2.048 Mbit/s delayed output of receive delay 90 is supplied to a buffer memory 96 which forms part of signal decoding circuitry 98. The buffer memory 96 outputs to a plurality of decoders 100, each comprising voice ADPCM decoders 101, data optimized ADPCM decoders 103, and facsimile encoders 105 with optional Error Correction (EC) 107, and is controlled by the main CPU 44 through control memory 97.

The received compressed signals are routed to the appropriate decoder type 101, 103 or 105, along 2.048 Mbit/s digital bit streams, in accordance with the messages received. Each set of voice ADPCM decoders 101 and each set of data optimized ADPCM decoders 103 can potentially produce two 2.048 Mbit/s digital bit streams of 8-bit PCM samples upon decoding one fully populated 2.048 Mbit/s digital bit stream of compressed signals. Each set of facsimile encoders 105 can potentially produce one 2.048 Mbit/s digital bit stream of 8-bit PCM per sample channels upon encoding one partly populated 2.048 Mbit/s digital bit stream of 9.6 Kbit/s demodulated facsimile signals. 6:1 decompression is provided when Error Correction EC 107 is not implemented and 4:1 decompression is provided when EC 107 is employed.

According to an alternative embodiment of the invention, buffer memory 96 receives packets of samples of either compressed speech, non-facsimile data or facsimile data. Buffer memory 96 is operative to store the received packets and to individually release the samples to the appropriate one of the plurality of decoders 100.

The receive DSI 95 switch receives the 2.048 Mbit/s digital streams of 8-bit PCM samples from the signal decoders 100. They are switched to eight 2.048 Mbit/s bit streams under control of CPU 44 in accordance with the routing message received from the far end terminal.

Reference is now made to Fig. 5 which illustrates the elements of the facsimile encoder 105 and of the optional EC 107. According to an alternate embodiment of the invention, the EC 107 performs error correction on the 16 kbit/s demodulated signal with error correction information received from buffer memory 96. The EC 107 first strips the signal of the dummy sixteenth bit. Using the Hamming (15,11) code, the EC 107 corrects any errors produced by the transmission and produces an 11 bit corrected signal. In order to produce the original 10 or 9 bit signal, one or two dummy bits, respectively, are subsequently stripped off, according to the status of the message dummy bit. The original 9 or 10 bit signal is sent to a buffer



140.

According to a preferred embodiment of the invention, facsimile decoder 105 comprises a plurality of facsimile modulators 142, such as the R96MFX Monofax from Rockwell International, and a plurality of PCM coders 144 where each PCM coder 144 is directly connected to a facsimile modulator 142. A typical facsimile decoder 105 comprises 31 facsimile modulators 142 and 31 PCM coders 144.

The facsimile decoder 105 operates as follows. The 9.6 kbit/s signal is received by buffer 140 as sequences of 9 or 10 bits. Buffer 140 stores the bits as they arrive and rebuilds the signal as an 8 bit signal which it then sends to a facsimile modulator 142 which has been tuned, by a facsimile Receive CPU (RCPU) 146, to the mode of operation by which the signal was demodulated on the transmit side. If the received facsimile data was originally scanned and encoded at a rate lower than 9.6 kbit/s, then the additional dummy bits are stripped in the buffer 140 and the 8 bit signal is sent to a facsimile modulator at a respectively lower rate.

The analog telephone waveform resulting from the facsimile modulator 142 is then sent to the corresponding PCM coder 144 which encodes the analog signal as a PCM signal. The plurality of PCM signals produced by the PCM decoders 144 are routed to the appropriate time slot in the trunk bit stream by a facsimile Receive TSI (RTSI) 148, such as the PEB 2040 PCM Switch from Siemens.

According to a preferred embodiment of the invention, facsimile RCPUs 146 are operative to indicate to the buffer 140 how to rebuild the 8 bit signal and to which facsimile modulator 142 to send the rebuilt signal. It also tunes the selected facsimile modulator 142 to the correct mode of operation according to directions received from the main CPU 44. Finally, it indicates to the facsimile RTSI 148 the time slots on the trunk bit stream corresponding to the outputs of the plurality of PCM coders 144.

It will be appreciated that a facsimile compression system such as described hereinabove can be constructed outside of an telecommunication system using elements functionally similar to those described hereinabove. However, incorporating such a system within an existing system, such as a digital circuit multiplication system or a speech packetization system, reduces the number of new elements which must be built since many of the necessary elements are already incorporated into the existing system.

## Claims

1. A telecommunication system for interconnecting a plurality of telephone communication trunks, carrying voice, facsimile and non-facsimile voiceband data signals, to a transmission network,

the system comprising:

transmission means at at least a first end of the transmission network including:

means (53) for detecting facsimile signals, as distinguished from other voiceband data signals, on the plurality of telephone communication trunks by detecting a signal unique to facsimile signals;

means (67) for demodulating only facsimile signals in response to detection by the means (53) for detecting of facsimile signals on the plurality of telephone communication trunks;

means for transmitting along the transmission network, in demodulated form, a facsimile signal output of the means for demodulating; and

receiving means at at least a second end of the transmission network including:

means (105) for modulating the demodulated facsimile signals received along the transmission network to produce voiceband facsimile signals.

2. A system according to claim 1, wherein the means (53) for detecting detects a signal sequence characteristic of a plurality of facsimile modes of operation.
3. A system according to claim 1 or claim 2, wherein the transmission means further comprises means for determining the mode of operation of the detected facsimile system.
4. A system according to claim 3 wherein the means for determining the mode of operation comprises:
  - a plurality of facsimile demodulators (126), each being programmed to demodulate at least one expected modem signal according to a facsimile standard;
  - means (128) for supplying incoming detected facsimile signals simultaneously to the plurality of facsimile demodulators; and
  - means (132) for determining which of the plurality of facsimile demodulators successfully demodulates an incoming facsimile signal.
5. A system according to claim 4 wherein the plurality of facsimile demodulators (126) includes V.29, V.21 and V.27 demodulators.
6. A system according to claim 5 and also comprising a buffer (130) providing a predetermined delay for receiving the outputs of said plurality of facsimile demodulators (126) and wherein positive identification of the transmission rate of a V.27 modem signal by a V.27 demodulator takes place after said predetermined delay.
7. A system according to claim 6, wherein upon de-

tection of a V.27 modem carrier but before positive identification of its transmission rate, said buffer (130) is operative to transmit at least part of the V.27 modem carrier.

8. A system according to any one of claims 3 to 7, wherein the transmitting means also comprises:
  - means for transmitting to said receiving means over said transmission network an indication of the mode of operation of the detected facsimile signals; and wherein said receiving means comprises means (44) responsive to a received indication of the mode of operation for causing said means (105) for modulating to operate in a corresponding mode of operation.
9. A system according to claim 1 or claim 2 wherein the transmission system also includes:
  - means (25) for compressing signals other than those detected by said means for detecting; and
  - means for transmitting said other signals along said transmission network.
10. A system according to claim 9 and also comprising:
  - switching means (56), responsive to the means (53) for detecting, for switching signals received along the telephone communication trunks to either said means (67) for demodulating or said means (25) for compressing.
11. A system according to any of claims 3 to 8 wherein the transmission system also includes:
  - means (25) for compressing signals other than those detected by said means for detecting; and
  - means for transmitting said other signals along said transmission network.
12. A system according to claim 11 and also comprising:
  - switching means responsive to the means (55) for detecting for switching signals received along the telephone communication trunks to either said means (67) for demodulating or said means (25) for compressing.
13. A system according to claim 12 wherein said means (56) for switching is operative to switch said detected signals to said means (25) for compressing when the means for determining the mode fails to make positive identification of the mode of a facsimile signal during a predetermined interval.
14. A system according to any of claims 10, 12 or 13 wherein said means (56) for switching is opera-

tive to switch signals to said means for demodulating only during a silent period occurring during facsimile handshake.

15. A system according to any of claims 9 to 14 and wherein the receiving means also comprises:
  - means for receiving said other signals transmitted along the transmission network; and
  - means for decompressing said other signals.
16. A system according to any of claims 9 to 15 wherein the means for compressing further comprises:
  - means for compressing said other signals in accordance with their classification; wherein said means for transmitting comprises:
    - means for transmitting said classification of the signals on the transmission network; wherein said means for receiving comprises:
      - means for receiving the transmission containing the classification of the other signals; and wherein the means for decompressing includes:
        - means for decompressing the other signals in accordance with said classification.
17. A system according to any of the preceding claims wherein the facsimile signals comprise Group III facsimile signals.
18. A system according to any of the preceding claims wherein said demodulating means comprises facsimile signal demodulator (67) and forward error correction means (59) and wherein said forward error correction means (69) are operative to protect the output of said facsimile demodulator (67).
19. A system according to any of the preceding claims wherein the transmission network comprises a plurality of transmission channels, and further comprising:
  - means (31) for assigning at least one of the signals received by the transmission system from the plurality of communication trunks to one of the transmission channels; and
  - means (30) for communicating the assignment and, optionally, error correction and classification signals regarding the signals along the transmission network.
20. A method for interconnecting a plurality of telephone communication trunks carrying voice, facsimile and non-facsimile voiceband data signals, to a transmission network, the method comprising:

detecting facsimile signals, as distinguished from other voiceband data signals received from the plurality of telephone communication trunks by detecting a signal unique to facsimile signals;

demodulating only detected facsimile signals in response to said detecting of facsimile signals to form demodulated facsimile signals; and transmitting the demodulated facsimile signals along a transmission network.

21. A method according to claim 20 wherein the step of detecting comprises the step of detecting a signal sequence characteristic of a plurality of facsimile modes of operation.
22. A method according to claim 20 or claim 21 wherein the step of demodulating comprises:  
determining the mode of operation of the detected facsimile signal.
23. A method according to claim 21 wherein the step of determining the mode of operation comprises:  
supplying an incoming detected facsimile signal simultaneously to a plurality of facsimile demodulators, each being programmed to demodulate at least one expected modem signal according to a facsimile standard; and  
determining which of the plurality of facsimile demodulators successfully demodulates an incoming selected facsimile signal.

#### Patentansprüche

1. Fernmeldesystem zum Verbinden einer Vielzahl von Fernspreverbindungsleitungen, die Sprach-, Fax- und Nichtfax-Sprachbanddatensignale transportieren, mit einem Übertragungsnetz, wobei das System aufweist:  
Übertragungsmittel an mindestens einem ersten Ende des Übertragungsnetzes mit:  
Mitteln (53) zum Feststellen von Fax-Signalen im Gegensatz zu anderen Sprachbanddatensignalen in der Vielzahl von Fernmeldeverbindungsleitungen durch Feststellen eines Signals, das nur für Fax-Signale spezifisch ist;  
Mitteln (67) zum Demodulieren ausschließlich von Fax-Signalen als Antwort auf das Feststellen durch die Mittel (53) zum Feststellen von Fax-Signalen in der Vielzahl von Fernspreverbindungsleitungen;  
Mitteln zum über das Übertragungsnetz in demodulierter Form erfolgenden Übertragen eines Fax-Ausgangssignals der Mittel zum Demodulieren; und  
Empfangsmittel an mindestens einem zweiten Ende des Übertragungsnetzes mit:

Mitteln (105) zum Modulieren der demodulierten Fax-Signale, die über das Übertragungsnetz empfangen werden, um Sprachband-Fax-Signale zu erzeugen.

5

10

15

20

25

30

35

40

45

50

55

2. System nach Anspruch 1, wobei die Mittel (53) zum Feststellen eine Signalfolge feststellen, die für eine Vielzahl von Fax-Betriebsarten charakteristisch ist.
3. System nach Anspruch 1 oder 2, wobei die Übertragungsmittel ferner Mittel zum Feststellen der Betriebsart des festgestellten Fax-Systems aufweisen.
4. System nach Anspruch 3, wobei die Mittel zum Feststellen der Betriebsart aufweisen:  
eine Vielzahl von Fax-Demodulatoren (126), wobei jeder so programmiert ist, daß er mindestens ein erwartetes Modemsignal nach einem Fax-Standard demoduliert;  
Mittel (128) zum gleichzeitigen Liefern von ankommenden festgestellten Fax-Signalen an die Vielzahl von Fax-Demodulatoren; und  
Mittel (132) zum Feststellen, welcher aus der Vielzahl von Fax-Demodulatoren ein ankommendes Fax-Signal erfolgreich demoduliert.
5. System nach Anspruch 4, wobei die Vielzahl von Fax-Demodulatoren (126) V.29-, V.21- und V.27-Demodulatoren einschließen.
6. System nach Anspruch 5, das auch einen Puffer (130) aufweist, der eine festgestellte Verzögerung für das Empfangen der Ausgangssignale der Vielzahl von Fax-Demodulatoren (126) schafft, und wobei nach der vorbestimmten Verzögerung eine positive Identifikation der Übertragungsrate eines V.27-Modemsignals durch einen V.27-Demodulator stattfindet.
7. System nach Anspruch 6, wobei bei Feststellung eines V.27-Modemträgers der Puffer (130) jedoch vor der positiven Identifikation seiner Übertragungsrate tätig wird, um mindestens einen Teil des V.27-Modemträgers zu übertragen.
8. System nach irgendeinem der Ansprüche 3 bis 7, wobei die Übertragungsmittel auch aufweisen:  
Mittel zum Übertragen einer Anzeige der Betriebsart der festgestellten Fax-Signale über das Übertragungsnetz an die Empfangsmittel; und wobei die Empfangsmittel Mittel (44) aufweisen, die auf eine empfangene Anzeige der Betriebsart ansprechen und die bewirken sollen, daß die Mittel (105) zum Modulieren in einer entsprechenden Betriebsart arbeiten.

9. System nach Anspruch 1 oder 2, wobei das Übertragungssystem auch umfaßt:

Mittel (25) zum Komprimieren von anderen Signalen als diejenigen, die mit den Mitteln zum Feststellen festgestellt werden; und

Mittel zum Übertragen der anderen Signale über das Übertragungsnetz.

10. System nach Anspruch 9, das auch aufweist:

Umschaltmittel (56), die auf die Mittel (53) zum Feststellen ansprechen, zum Umschalten von Signalen, die über die Fernsprechverbindungsleitungen empfangen werden, entweder auf die Mittel (67) zum Demodulieren oder auf die Mittel (25) zum Komprimieren.

11. System nach irgendeinem der Ansprüche 3 bis 8, wobei das Übertragungssystem auch umfaßt:

Mittel (25) zum Komprimieren von anderen Signalen als diejenigen, die von den Mitteln zum Feststellen festgestellt werden; und

Mittel zum Übertragen der anderen Signale über das Übertragungsnetz.

12. System nach Anspruch 11, das auch aufweist:

Umschaltmittel, die auf die Mittel (55) zum Feststellen ansprechen, zum Umschalten von Signalen, die über die Fernsprechverbindungsleitungen empfangen werden, entweder auf die Mittel (67) zum Demodulieren oder auf die Mittel (25) zum Komprimieren.

13. System nach Anspruch 12, wobei die Mittel (56) zum Umschalten tätig werden, um die festgestellten Signale auf die Mittel (25) zum Komprimieren umzuschalten, wenn die Mittel zum Feststellen der Betriebsart während eines vorbestimmten Intervalls keine positive Identifikation der Betriebsart eines Fax-Signals erreichen.

14. System nach irgendeinem der Ansprüche 10, 12 oder 13, wobei die Mittel (56) zum Umschalten nur während einer Ruheperiode, die während des Fax-Quittungsbetriebs auftritt, tätig werden, um Signale auf die Mittel zum Demodulieren umzuschalten.

15. System nach irgendeinem der Ansprüche 9 bis 14, wobei die Empfangsmittel auch aufweisen:

Mittel zum Empfangen der anderen Signale, die über das Übertragungsnetz übertragen werden; und

Mittel zum Dekomprimieren der anderen Signale.

16. System nach irgendeinem der Ansprüche 9 bis 15, wobei die Mittel zum Komprimieren ferner aufweisen:

Mittel zum Komprimieren der anderen Signale entsprechend ihrer Klassifikation; wobei die Mittel zum Übertragen aufweisen:

Mittel zum Übertragen der Klassifikation der Signale im Übertragungsnetz; wobei die Mittel zum Empfangen aufweisen:

Mittel zum Empfangen der Übertragung, die die Klassifikation der anderen Signale enthält; und

wobei die Mittel zum Dekomprimieren umfassen:

Mittel zum Dekomprimieren der anderen Signale entsprechend der Klassifikation.

17. System nach einem der vorhergehenden Ansprüche, wobei die Fax-Signale Fax-Signale der Gruppe 3 aufweisen.

18. System nach einem der vorhergehenden Ansprüche, wobei die Demoduliermittel einen Fax-Signaldemodulator (67) und Vorwärtsfehlerkorrekturmittel (69) aufweisen und wobei die Vorwärtsfehlerkorrekturmittel (69) tätig werden, um das Ausgangssignal des Fax-Demodulators (67) zu schützen.

19. System nach irgendeinem der vorhergehenden Ansprüche, wobei das Übertragungsnetz eine Vielzahl von Übertragungskanälen aufweisen und ferner aufweist:

Mittel (31) zum Zuweisen mindestens eines der Signale, die durch das Übertragungssystem von der Vielzahl von Verbindungsleitungen empfangen werden, zu einem der Übertragungskanäle; und

Mittel (30) zum Melden der Zuweisung und, als Wahlmöglichkeit, der Fehlerkorrektur und Klassifikationssignale in bezug auf die Signale über das Übertragungsnetz.

20. Verfahren zum Verbinden einer Vielzahl von Fernsprechverbindungsleitungen, die Sprach-, Fax-, und Nichtfax-Sprachbanddatensignale transportieren, mit einem Übertragungsnetz, wobei das Verfahren aufweist:

das Feststellen von Fax-Signalen im Unterschied zu anderen Sprachbanddatensignalen, die von der Vielzahl von Fernsprechverbindungsleitungen empfangen werden, durch Feststellen eines Signals, das nur für Fax-Signale spezifisch ist;

Demodulieren lediglich von festgestellten Fax-Signalen als Antwort auf das Feststellen von Fax-Signalen, um demodulierte Fax-Signale zu bilden; und

Übertragen der demodulierten Fax-Signa-

le über ein Übertragungsnetz,

21. Verfahren nach Anspruch 20, wobei der Schritt des Feststellens den Schritt des Feststellens einer Signalfolge aufweist, die für eine Vielzahl von Fax-Betriebsarten charakteristisch ist. 5
22. Verfahren nach Anspruch 20 oder 21, wobei der Schritt des Demodulierens aufweist:  
Bestimmen der Betriebsart des festgestellten Fax-Signals. 10
23. Verfahren nach Anspruch 21, wobei der Schritt des Feststellens der Betriebsart aufweist:  
gleichzeitiges Liefern eines ankommenden festgestellten Fax-Signals an eine Vielzahl von Fax-Demodulatoren, wobei jeder so programmiert ist, das er mindestens ein erwartetes Modemsignal nach einem Fax-Standard demoduliert; und 15  
Bestimmen, welcher aus der Vielzahl von Fax-Demodulatoren ein ankommendes gewähltes Fax-Signal erfolgreich demoduliert. 20

#### Revendications

1. Système de télécommunication pour interconnecter une pluralité d'artères de communication téléphonique, qui véhiculent des signaux de données en bande vocale, de parole, de télécopie et de non télécopie, à un réseau de transmission, le système comprenant:  
des moyens de transmission situés au niveau d'au moins une première extrémité du réseau de transmission, incluant:  
des moyens (53) pour détecter des signaux de télécopie, en les distinguant d'autres signaux de données en bande vocale, sur la pluralité d'artères de communication téléphonique, en détectant un signal qui est propre à des signaux de télécopie;  
des moyens (67) pour démoduler seulement des signaux de télécopie en réponse à la détection par les moyens (53) pour détecter des signaux de télécopie sur la pluralité d'artères de communication téléphonique; des moyens pour transmettre le long du réseau de transmission, sous forme démodulée, un signal de télécopie émis en sortie depuis les moyens de démodulation; et  
des moyens de réception situés au niveau d'au moins une seconde extrémité du réseau de transmission, incluant:  
des moyens (105) pour moduler les signaux de télécopie démodulés reçus le long du réseau de transmission, pour produire des signaux de télécopie en bande vocale. 25
2. Système selon la revendication 1, dans lequel les moyens (53) de détection détectent une séquence de signaux caractéristique d'une pluralité de modes de fonctionnement en télécopie.
3. Système selon la revendication 1 ou 2, dans lequel les moyens de transmission comprennent en outre des moyens pour déterminer le mode de fonctionnement du système de télécopie détecté.
4. Système selon la revendication 3, dans lequel les moyens de détermination de mode de fonctionnement comprennent:  
une pluralité de démodulateurs de télécopie (126), chacun étant programmé pour démoduler au moins un signal de modem attendu conformément à un standard de télécopie;  
des moyens (128) pour appliquer simultanément des signaux de télécopie détectés arrivants à la pluralité de démodulateurs de télécopie; et  
des moyens (132) pour déterminer lequel de la pluralité de démodulateurs de télécopie démodule avec succès un signal de télécopie arrivant. 30
5. Système selon la revendication 4, dans lequel la pluralité de démodulateurs de télécopie (126) incluent des démodulateurs V.29, V.21 et V.27.
6. Système selon la revendication 5, comprenant également un tampon (130) assurant un retard prédéterminé pour recevoir les sorties de ladite pluralité de démodulateurs de télécopie (126) et dans lequel une identification positive du débit de transmission d'un signal de modem V.27 par un démodulateur V.27 est mise en oeuvre après ledit retard prédéterminé. 35
7. Système selon la revendication 6, dans lequel, lors de la détection d'une porteuse de modem V.27 mais avant une identification positive de son débit de transmission, ledit tampon (130) fonctionne pour transmettre au moins une partie de la porteuse de modem V.27. 40
8. Système selon l'une quelconque des revendications 3 à 7, dans lequel les moyens de transmission comprennent également:  
des moyens pour transmettre vers lesdits moyens de réception sur ledit réseau de transmission une indication du mode de fonctionnement des signaux de télécopie détectés; et dans lequel lesdits moyens de réception comprennent des moyens (44) sensibles à une indication reçue du mode de fonctionnement pour faire en sorte que lesdits moyens de modulation (105) fonctionnent dans un mode de fonctionnement corres- 45

pendant.

9. Système selon la revendication 1 ou 2, dans lequel le système de transmission inclut également:

des moyens (25) pour comprimer des signaux autres que ceux détectés par lesdits moyens de détection; et

des moyens pour transmettre lesdits autres signaux le long dudit réseau de transmission.

10. Système selon la revendication 9, comprenant également:

des moyens de commutation (56) sensibles aux moyens de détection (53) pour commuter des signaux reçus le long des artères de communication téléphonique sur soit lesdits moyens de démodulation (67) soit lesdits moyens de compression (25).

11. Système selon l'une quelconque des revendications 3 à 8, dans lequel le système de transmission inclut également:

des moyens (25) pour comprimer des signaux autres que ceux détectés par lesdits moyens de détection; et

des moyens pour transmettre lesdits autres signaux le long dudit réseau de transmission.

12. Système selon la revendication 11, comprenant également:

des moyens de commutation sensibles aux moyens de détection (55) pour commuter des signaux reçus le long des artères de communication téléphonique sur soit lesdits moyens de démodulation (67) soit lesdits moyens de compression (25).

13. Système selon la revendication 12, dans lequel lesdits moyens de commutation (56) fonctionnent pour commuter lesdits signaux détectés sur lesdits moyens de compression (25) lorsque les moyens de détermination de mode échouent à réaliser une identification positive du mode d'un signal de télécopie pendant un intervalle prédéterminé.

14. Système selon l'une quelconque des revendications 10, 12 ou 13, dans lequel lesdits moyens de commutation (56) fonctionnent pour commuter des signaux sur lesdits moyens de démodulation seulement pendant une période de silence qui survient pendant un établissement de liaison de télécopie.

15. Système selon l'une quelconque des revendica-

tions 9 à 14, dans lequel lesdits moyens de réception comprennent également:

des moyens pour recevoir lesdits autres signaux transmis le long du réseau de transmission; et

des moyens pour décompresser lesdits autres signaux.

16. Système selon l'une quelconque des revendications 9 à 15, dans lequel les moyens de compression comprennent en outre:

des moyens pour comprimer lesdits autres signaux conformément à leur classification.

dans lequel lesdits moyens de transmission comprennent:

des moyens pour transmettre ladite classification des signaux sur le réseau de transmission,

dans lequel lesdits moyens de réception comprennent:

des moyens pour recevoir la transmission qui contient la classification des autres signaux; et

dans lequel les moyens de décompression incluent:

des moyens pour décompresser les autres signaux conformément à ladite classification.

17. Système selon l'une quelconque des revendications précédentes, dans lequel les signaux de télécopie comprennent des signaux de télécopie du groupe III.

18. Système selon l'une quelconque des revendications précédentes, dans lequel lesdits moyens de démodulation comprennent un démodulateur de signal de télécopie (67) et des moyens de correction d'erreurs sans voie de retour (69) et dans lequel lesdits moyens de correction d'erreurs sans voie de retour (69) fonctionnent pour protéger la sortie dudit démodulateur de télécopie (67).

19. Système selon l'une quelconque des revendications précédentes, dans lequel le réseau de transmission comprend une pluralité de canaux de transmission et comprend en outre:

des moyens (31) pour assigner au moins l'un des signaux reçus par le système de transmission parmi la pluralité d'artères de communication à l'un des canaux de transmission; et

des moyens (30) pour communiquer l'assignation et, de façon optionnelle, des signaux de correction et de classification d'erreur concernant les signaux le long du réseau de transmission.

20. Procédé pour interconnecter une pluralité d'artères de communication téléphonique, qui véhicu-

lent des signaux de données en bande vocale, de parole, de télécopie et de non télécopie, à un réseau de transmission, le procédé comprenant:

la détection de signaux de télécopie en les distinguant d'autres signaux de données en bande vocale reçus depuis la pluralité d'artères de communication téléphonique en détectant un signal qui est propre à des signaux de télécopie;

la démodulation de seulement les signaux de télécopie détectés en réponse à ladite détection de signaux de télécopie pour former des signaux de télécopie démodulés; et

la transmission des signaux de télécopie démodulés le long d'un réseau de transmission.

21. Procédé selon la revendication 20, dans lequel l'étape de détection comprend l'étape de détection d'une séquence de signaux caractéristique d'une pluralité de modes de fonctionnement en télécopie.

22. Procédé selon la revendication 20 ou 21, dans lequel l'étape de démodulation comprend:

la détermination du mode de fonctionnement du signal de télécopie détecté.

23. Procédé selon la revendication 21, dans lequel l'étape de détermination de mode de fonctionnement comprend:

l'application simultanée d'un signal de télécopie détecté arrivant à une pluralité de démodulateurs de télécopie, chacun étant programmé pour démoduler au moins un signal de modem attendu conformément à un standard de télécopie; et

la détermination de celui de la pluralité de démodulateurs de télécopie qui démodule avec succès un signal de télécopie sélectionné arrivant.

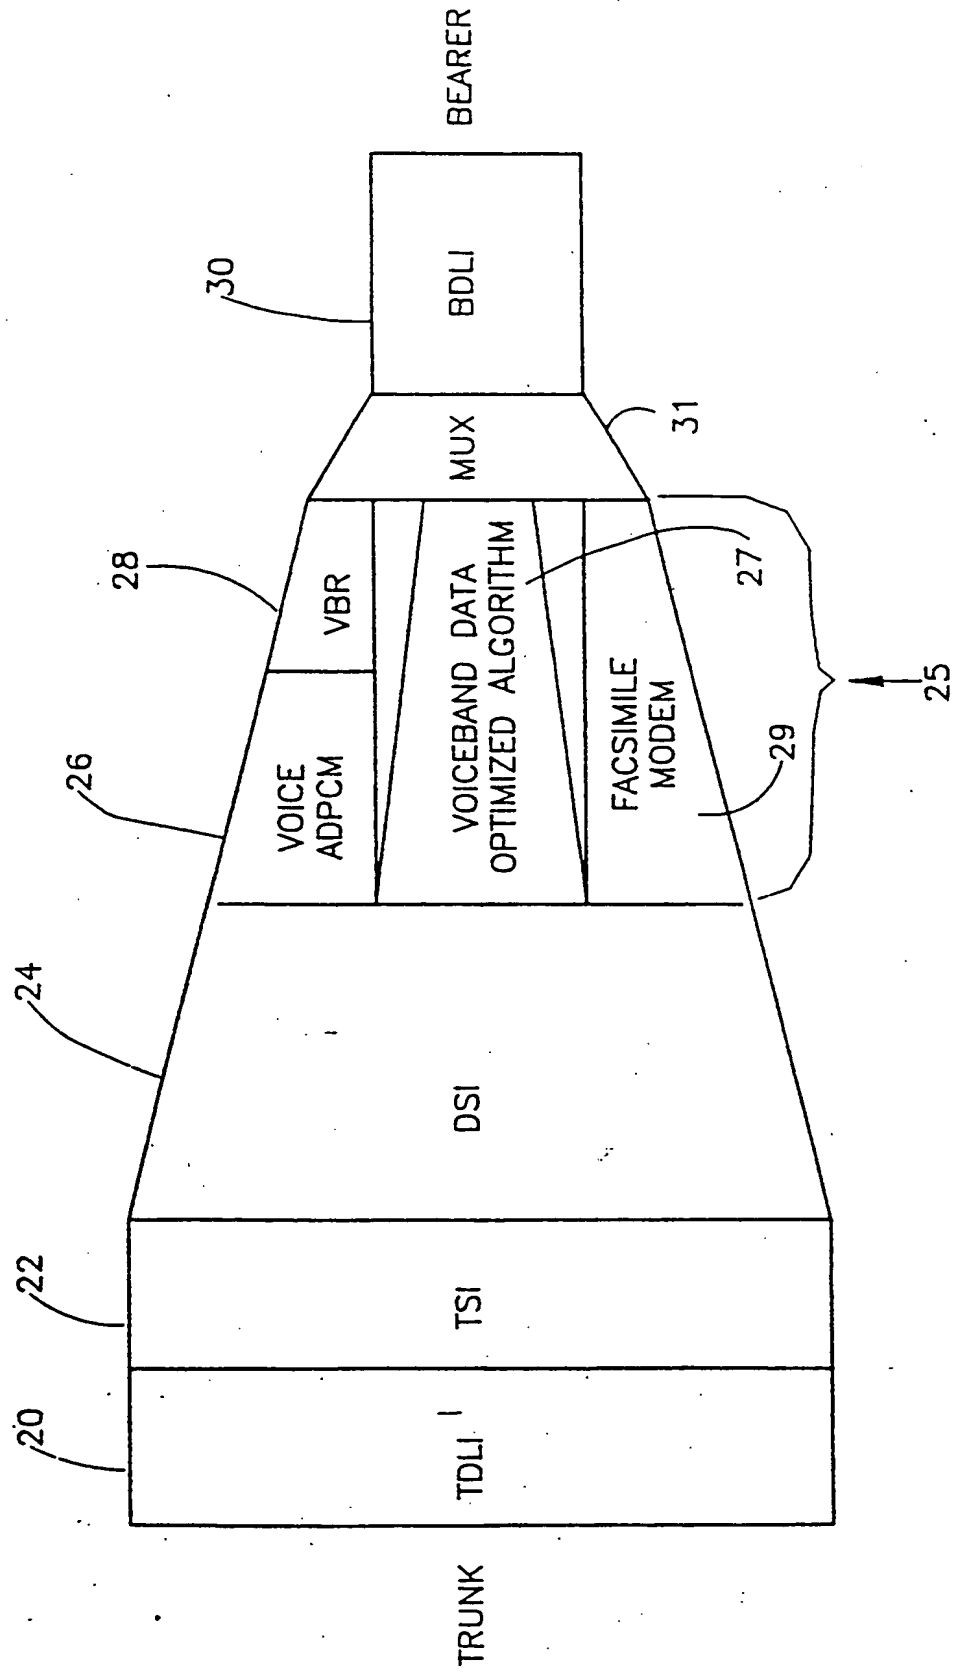


FIG.1





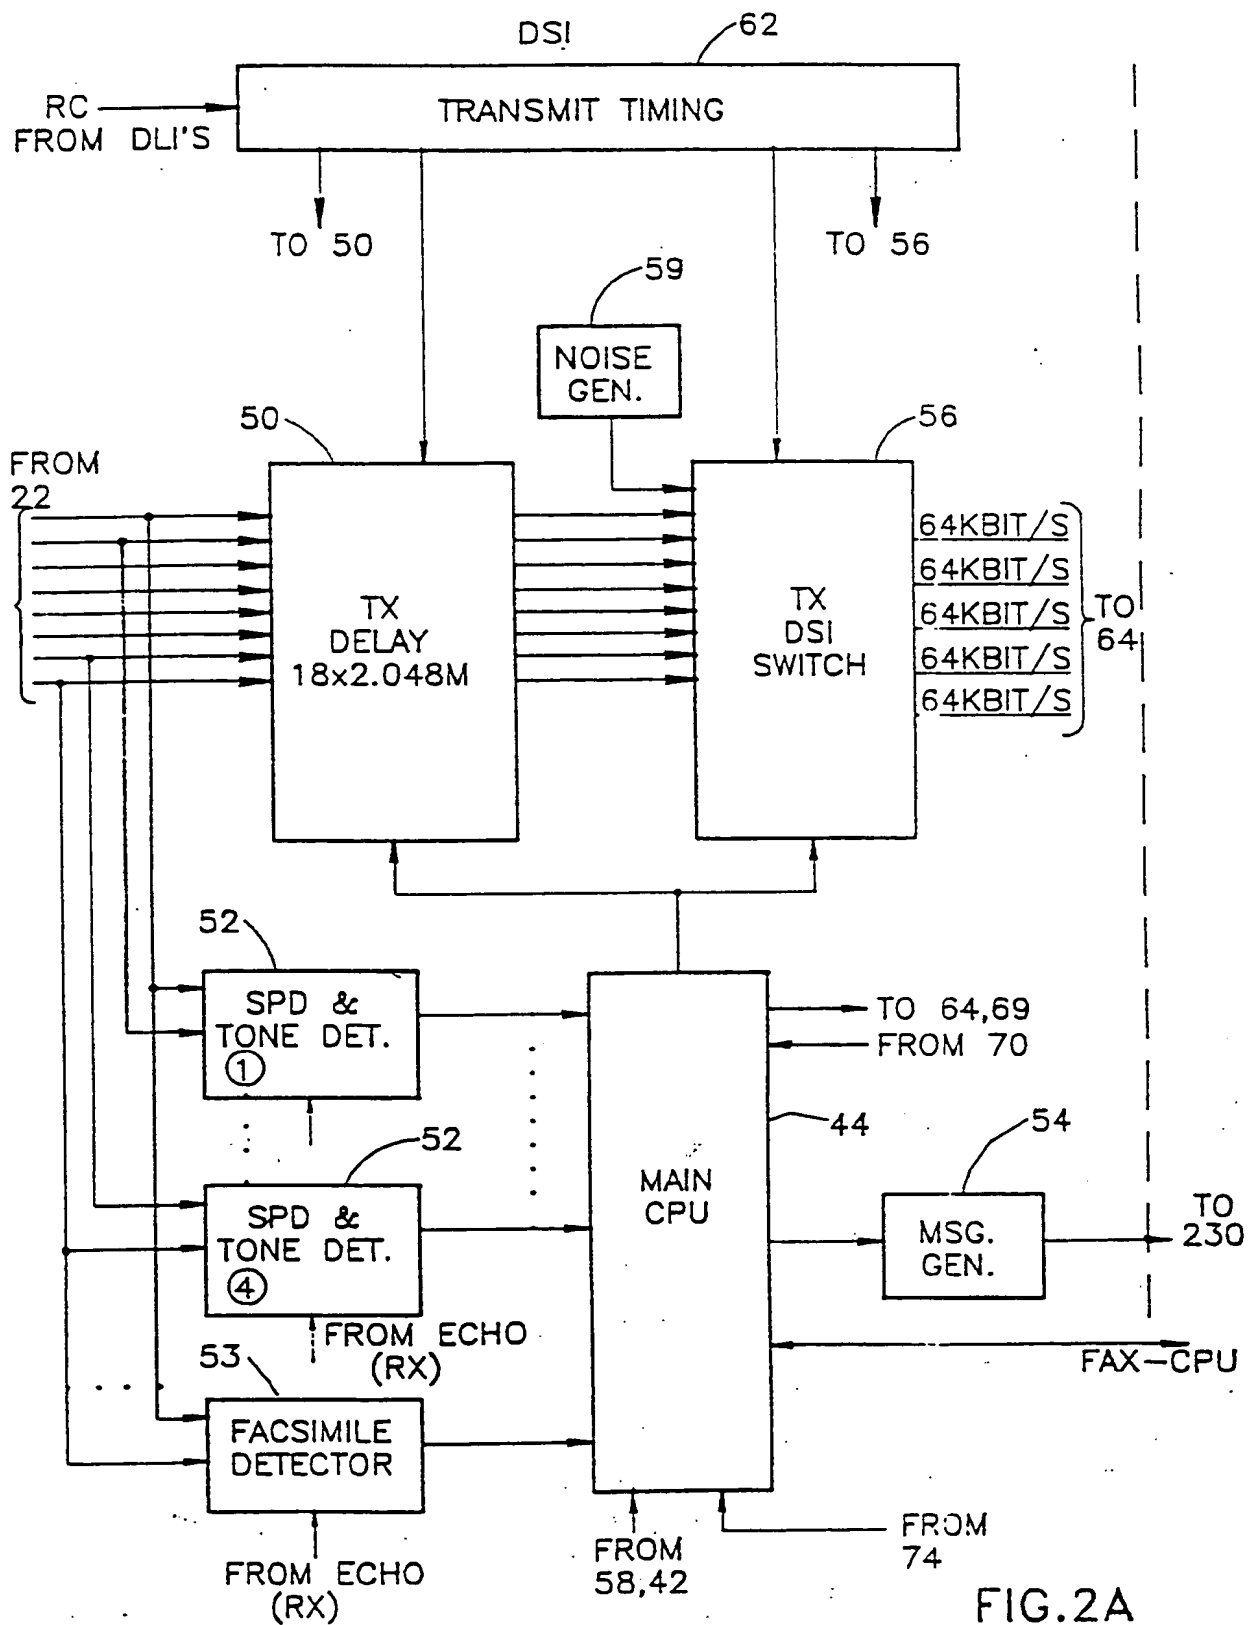


FIG. 2A

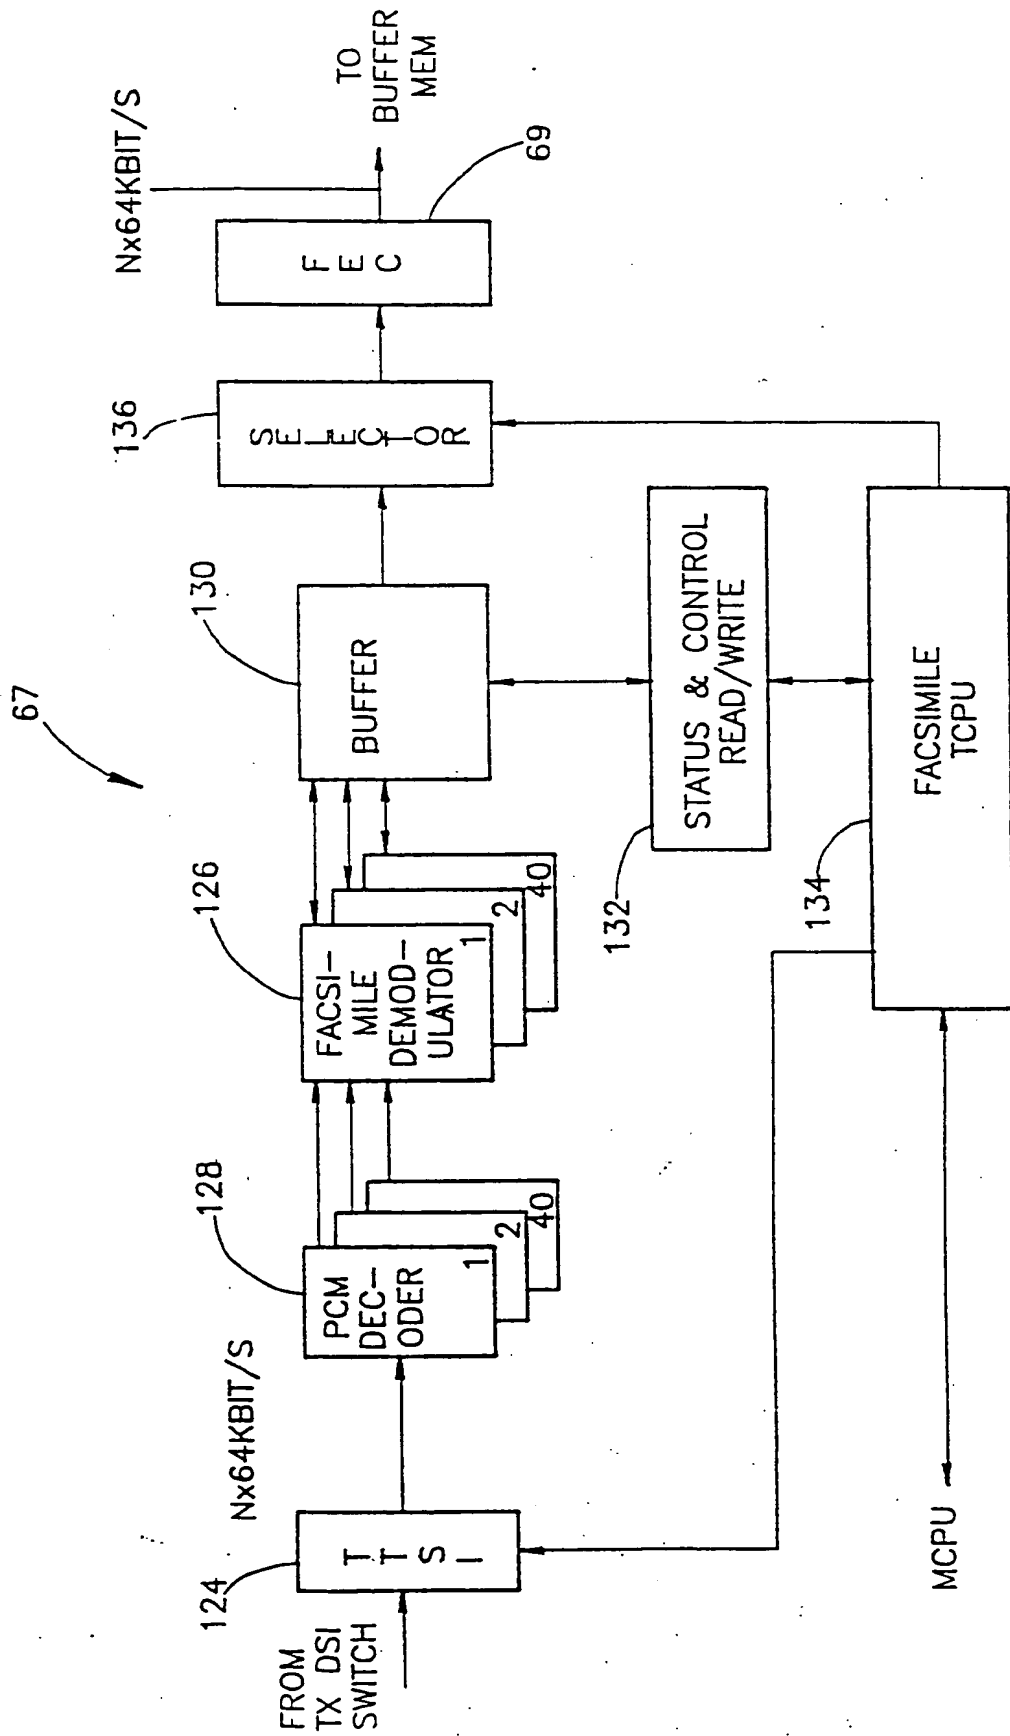


FIG.3

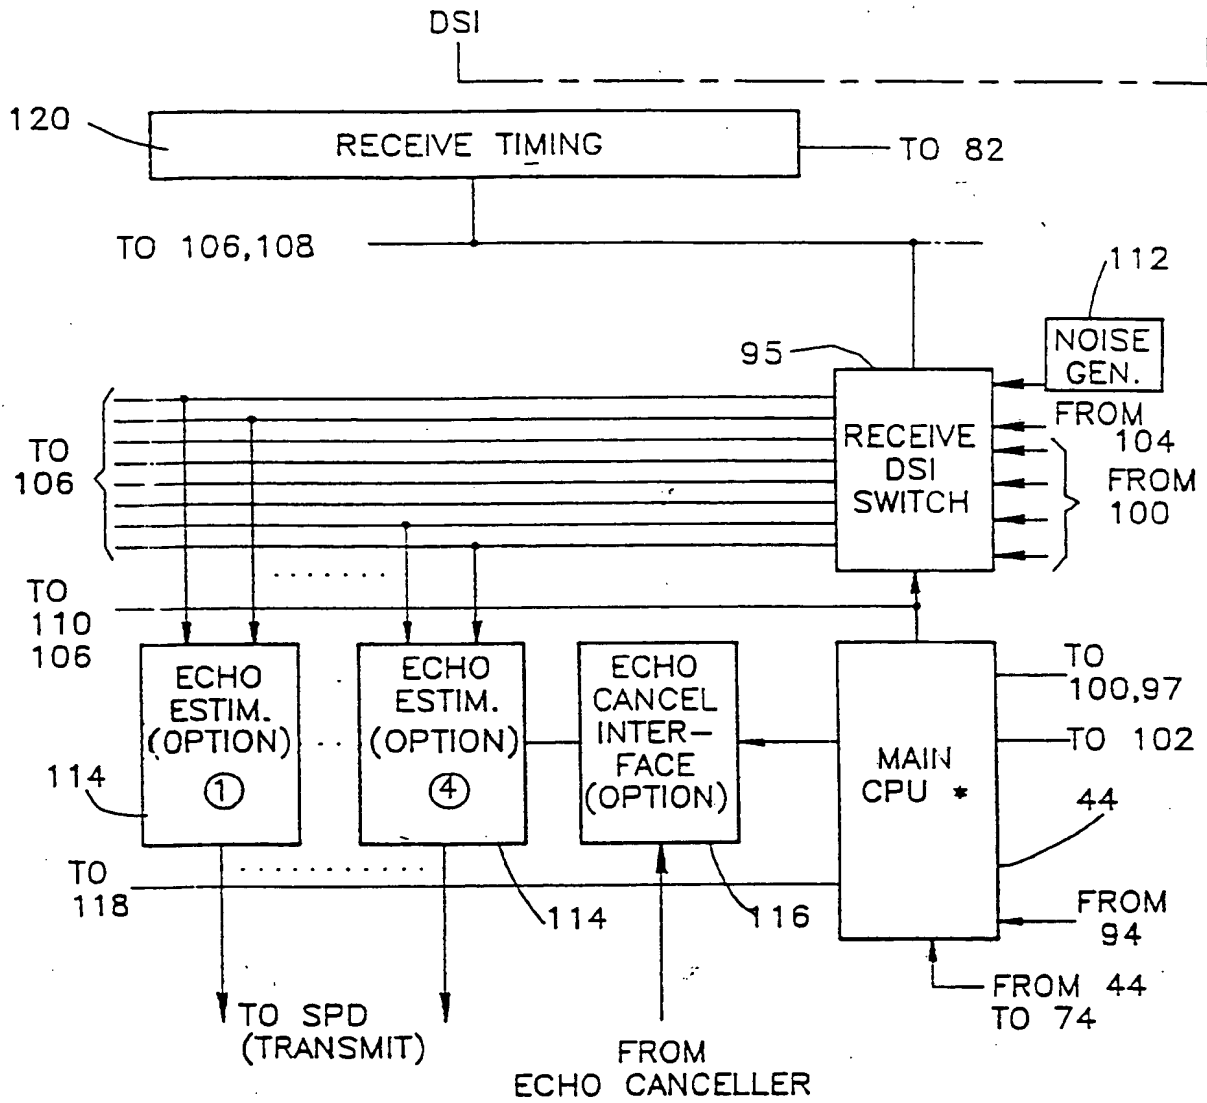


FIG.4A

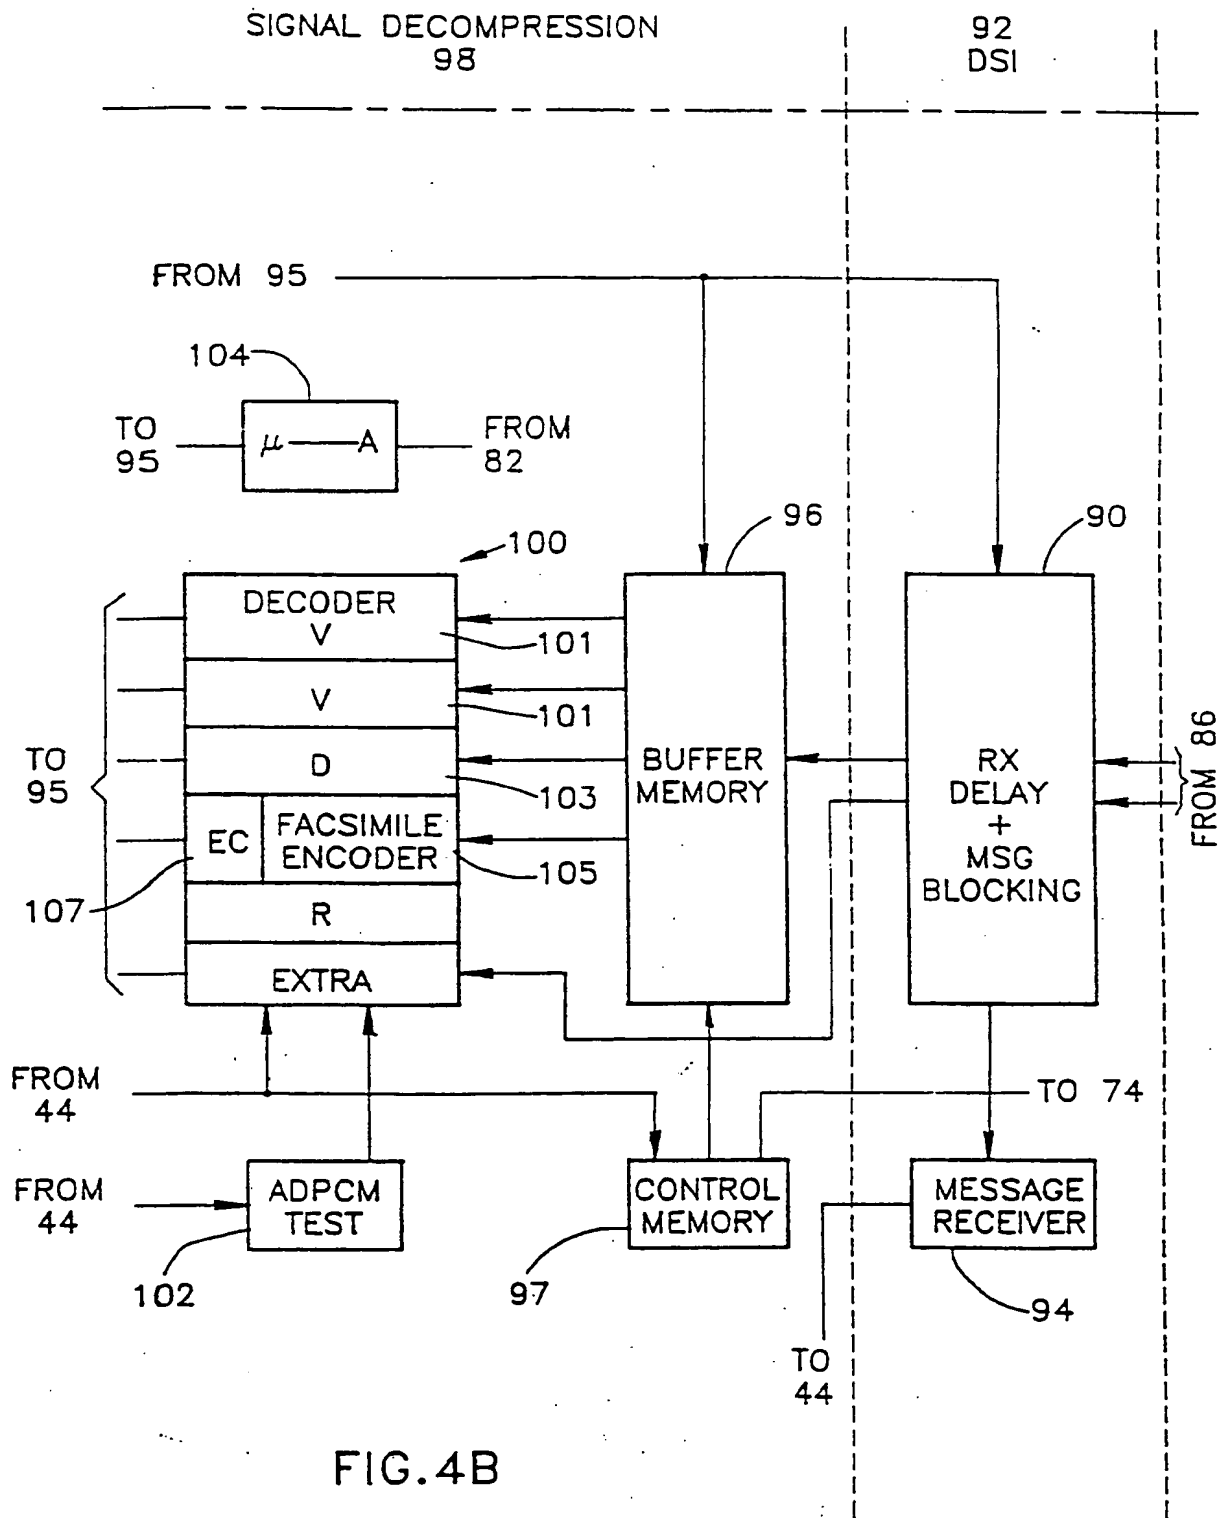


FIG. 4B

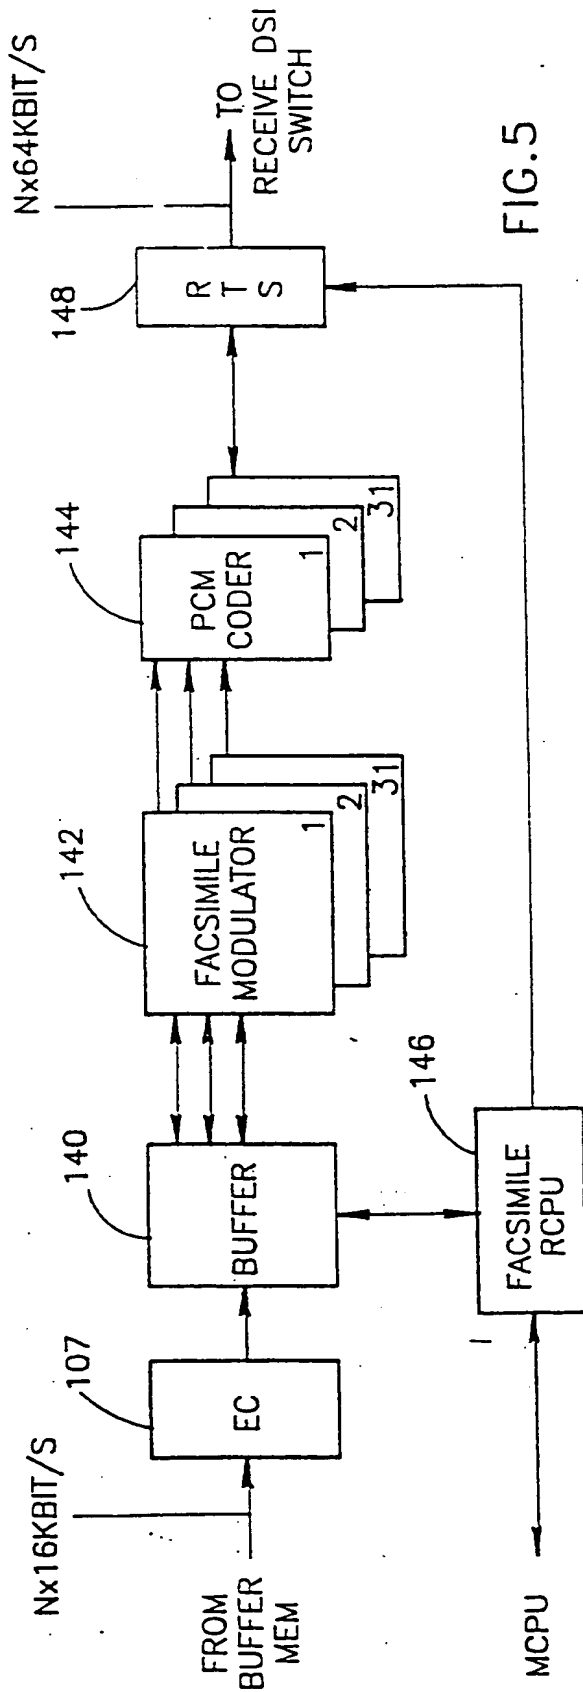


FIG. 5

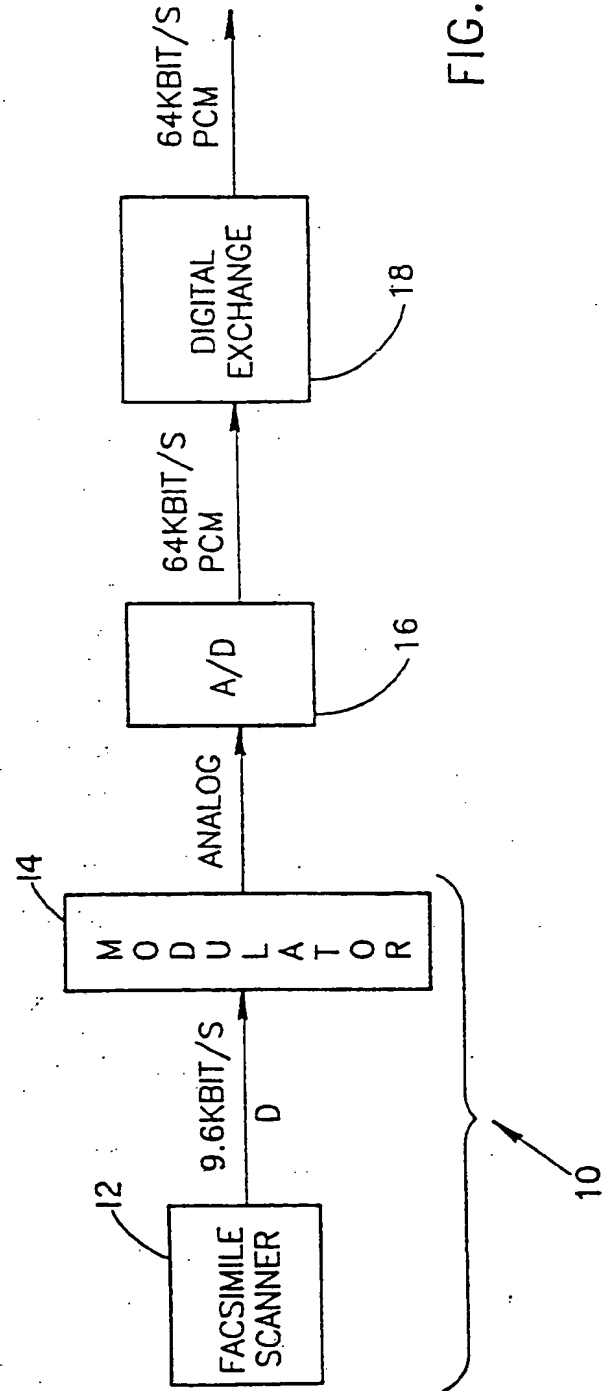


FIG. 6